
## My Favorite Equations #001:

Approximate expression of Inductance of magnetic flux pickup coil suited in a gap of a magnet with a window-frame type Yoke.

$$e^{-\{L(X,Y)/s - \frac{\mu_0}{4\pi}\}/(\frac{\mu_0}{2\pi})} = \frac{a^2}{(w-a)^2} \frac{(H-2Y)^2 + a^2}{(H-2Y)^2 + (w-a)^2} \frac{(H+2Y)^2 + a^2}{(H+2Y)^2 + (w-a)^2} \frac{(W-2X)^2 - (w-a)^2}{(W-2X)^2 - a^2} \frac{(W+2X)^2 - (w-a)^2}{(W+2X)^2 - a^2}$$

 $W = w_g$  $H = h_g$ 

(X, Y) is the location of the center of a pickup coil. "a" means the radius of a pickup coil.

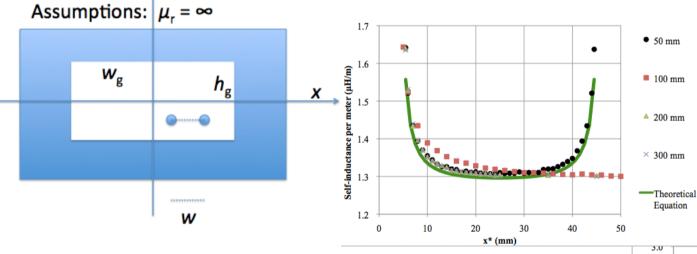

Comparizon with the calculated result by using 2D Maxwell code

Mod-Az plane with the center-located case by calculating theoretical equations. The right contour shows flux lines in the case without the Yoke effect.

